
## —QuickBuild





## **Process Instrument Gauges & Transmitters**



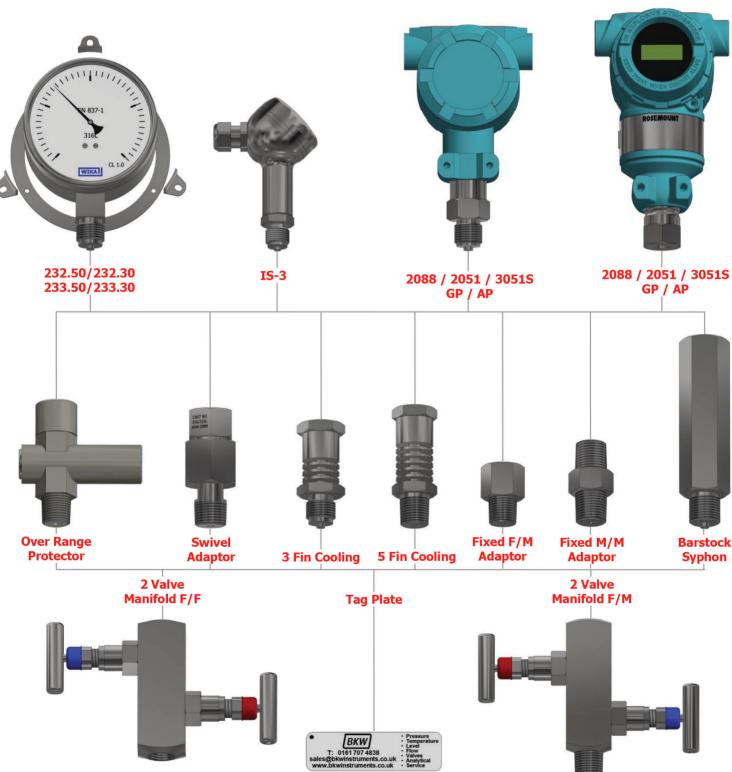



Designed, assembled, tested, calibrated & despatched within 3 days!

Phone: 0161 707 4838 Email: sales@bkwinstruments.co.uk





## **—QuickBuild**



| PRESSURE GAUGES & TRANSMITTERS |  |  |  |   |                                      |   |   |                            |
|--------------------------------|--|--|--|---|--------------------------------------|---|---|----------------------------|
| Model:                         | 232.50 /<br>233.50   | 232.30 /<br>233.30   | IS-3   | 2088  |                                      | 2051  | 3051S   |                            |
| Description:                   | Stainless Steel<br>100mm (4")<br>Industrial                                  | Stainless Steel<br>100mm (4")<br>Safety Pattern ATEX   | Stainless Steel<br>Field Housing<br>Hazardous Area<br>ATEX / IECEx<br>Intrinsically Safe | Aluminium Housing<br>In-line<br>ATEX Flameproof<br>Intrinsically Safe<br>Type n, Dust |                                      | Aluminium Housing<br>LCD Indicator<br>ATEX Flameproof<br>Intrinsically Safe<br>Type n, Dust | Aluminium Housing<br>LCD Indicator<br>ATEX Flameproof<br>Intrinsically Safe<br>Type n, Dust |                            |
| Output:                        | N/A  | N/A  | 4 20 mA  | 4 20 mA HART  |                                      | 4 20 mA HART  | 4 20 mA HART  |                            |
| Input:                         | N/A  | N/A  | 2 wire   | 2 wire  |                                      | 2 wire  | 2 wire  |                            |
| IP Rating:                     | IP65   | IP65   | IP69K  | IP66/68   |                                      | IP66/68   | IP66/68   |                            |
| Thread/Conn:                   | G 1/2 B  | G 1/2 B or 1/2" NPT  | G 1/2 B  | G 1/2 B or  | 1/2" NPT                             | G 1/2 B or 1/2" NPT   | G 1/2 B o   | r 1⁄2" NPT                 |
| Ranges:                        | Fixed bar / psi -1 / 0 0 - 1 0 - 2.5 0 - 4 0 - 6 0 - 10 0 - 16 0 - 25 0 - 40 | Fixed bar / psi -1 / 0 0 - 1 0 - 2.5 0 - 4 0 - 6 0 - 10 0 - 16 0 - 25 0 - 40 0 - 160 0 - 250 0 - 400 0 - 250 0 - 400 0 - 600 | Fixed Gauge barg -1 / 0 0 - 2.5 0 - 4 0 - 10 0 - 16 0 - 40                               | Scalable Gauge barg 0 - 2.1 0 - 10 0 - 55   | Absolute<br>bar<br>0 – 2.1<br>0 – 10 | Scalable Gauge barg 0 – 10 0 – 55 0 – 276   | Scalable Gauge barg 0 – 10 0 – 55 0 – 276   | Absolute<br>bar<br>0 – 2.1 |
| Options:                       | Back Plate   | Lugs   | -  |   |                                      | -   |   | -                          |

| Model:      | Over Rai               | nge Protec          | or       | Cooling Tower |                 |         |                |   | Barstock Syphon |                 |  |
|-------------|------------------------|---------------------|----------|---------------|-----------------|---------|----------------|---|-----------------|-----------------|--|
| Details:    |                        | 2-6 bar<br>5-25 bar |          | 3 Fin         | 5 Fin           |         |                |   | _               |                 |  |
| Details.    |                        | 0-60 bar            |          | 3 Fill        |                 |         |                |   | -               |                 |  |
| Instrument: | Female 1/2" NPT        |                     | Fema     | ale 1/2" BSP  | Female 1/2" BSP |         | Fen            | nale ½" NPT   | Female 1/2" BSP | Female 1/2" NPT |  |
| Process:    | Male 1/2" NPT          |                     | Ma       | ale 1/2" BSP  | Male 1/2" BSP   |         | ľ              | Male 1/2" NPT                                       | Male 1/2" BSP   | Male 1/2" NPT   |  |
| Material:   | 316 Stainless Steel    |                     |          |               |                 |         |                |   |                 |                 |  |
| Model:      | Fixed Adaptor          |                     |          |               |                 |         | Swivel Adaptor |   |                 |                 |  |
| Details:    | Female to Male Male to |                     |          |               |                 | 4ale    |                |   |                 |                 |  |
| Instrument: | 1/2" BSP               | 1/2" BSP            | 1/2" BSP | 1/2" NPT      | 1/2" NPT        | 1/2" NP | T              | Various ½" BSP or NPT configurations are available. |                 |                 |  |
| Process:    | 1/2" NPT               | 1/4" BSP            | 1/4" NPT | 1/2" BSP      | ½" BSPT         | 1/2" NP | T              |   |                 |                 |  |
| Material:   | 316 Stainless Steel    |                     |          |               |                 |         |                |   |                 |                 |  |

| Model:       |                         | Valve 2 Way Direct Manifold |                         |  |  |  |  |  |
|--------------|-------------------------|-----------------------------|-------------------------|--|--|--|--|--|
| Description: | 1/2" BSP F x 1/2" BSP M | 1/2" NPT F x 1/2" NPT M     | 1⁄2" NPT F x 1⁄2" NPT F |  |  |  |  |  |
| Material:    |                         | 316 Stainless Steel         |                         |  |  |  |  |  |

## 316 Stainless Steel Tags

Advise your unique identification number.

| <b>Documentation</b> |                         |                           |                          |                            |                  |  |  |
|----------------------|-------------------------|---------------------------|--------------------------|----------------------------|------------------|--|--|
| Туре:                | QS CALCERT              | COC                       | QB 3.1CERT               | SPCERT                     | TC               |  |  |
| Description:         | Calibration Certificate | Certificate of Conformity | 3.1 Material Certificate | Set Point Test Certificate | Test Certificate |  |  |



Designed, assembled, tested, calibrated & despatched within 3 days!

ergonered by Achilles

Verified

Verified



Phone: 0161 707 4838 Email: sales@bkwinstruments.co.uk