

SLA5800 Series

Elastomer Sealed, Digital, General Purpose Gas Mass Flow Controllers & Meters

The SLA5800 Series thermal mass flow controllers and meters have gained broad acceptance as the standard for accuracy, stability and reliability. These products have a wide flow measurement range and are suitable for a broad range of temperature and pressure conditions making them well suited for chemical and petrochemical research, laboratory, analytical, fuel cell and life science applications, among others.



Features

Industry-Leading Long-Term Sensor Stability

User Accessible Service Port

Alarms and Diagnostics

Superior Valve Technology

High Accuracy Traceable to International Standards

Simple Modular Architecture

Adaptable Wide Range of Configurations

Benefits

Increased system uptime and reduced cost of ownership by reducing maintenance and eliminating periodic recipe adjustments and/or recalibrations

Simplified installation, start-up, troubleshooting and access to diagnostics provide maximum uptime

Ensures device is operating within user specified limits for high process yield and uptime

Minimum leak-by, wide turndown, fast response and superior corrosion resistant materials reduces overall gas panel cost and increases throughput

Primary calibration backed by 17025 metrology systems ensures precise process gas flow control

Easy-to-service elastomer sealed design provides for factory or field service maximizing uptime and reducing total cost of ownership

Easily retrofit to existing systems

Product Specifications

SLA5800 Series Standard

Mass Flow Controller Model	Mass Flow Meter Model	Flow Ranges N ₂ Eq. Ratings		Maximum Operating Pressure psi / bar		PED Module H Category
		Min. F.S.	Max. F.S.	Standard ¹	Optional ¹	
SLA5850	SLA5860	0.003 slpm	50 slpm	1500 psi / 103 bar	4500 psi / 310 bar @ Max. Flow of 10 lpm (meter) or 50 lpm (controller)	SEP
SLA5851	SLA5861	15 slpm	150 slpm ²	1500 psi / 103 bar	N/A ³	SEP
SLA5853	SLA5863	100 slpm	2500 slpm	1000 psi / 69 bar	N/A	Category 1 for all 150 lb flanges Category 2 for all other connections

¹ Sanitary fittings - Model code 5A, 5B, 5C, 5D & 5E rated to 500 psi Maximum Pressure.

² 600 lpm of H₂ possible with decreased accuracy; >40 psig inlet required for flows greater than 100 lpm N₂ equivalent.

³ 4500 psi / 310 bar available as a special on SLA5861 only. Increased footprint, consult Applications Engineering for details.

	SLA5850/60	SLA5851/61	SLA5853/63
--	------------	------------	------------

Performance

Full Scale Flow Range (N ₂ , Eq. 0°C Ref)	0.003 - 50 slpm	15 - 150 slpm	100 - 1100 slpm	>1100 - 2500 slpm		
Flow Accuracy—17025 Certified Devices (Includes linearity, excludes calibration system measurement uncertainty per SEMI E69) ⁴	$\pm 0.6\%$ of S.P. (20 - 100% F.S.), $\pm 0.12\%$ F.S. (<20% F.S.)			$\pm 0.6\%$ of F.S.		
Flow Accuracy (Includes linearity and calibration system measurement uncertainty per SEMI E69) ⁴	$\pm 0.9\%$ of S.P. (20 - 100% F.S.), $\pm 0.18\%$ of F.S. (<20% F.S.)			$\pm 1.0\%$ of F.S.		
Control Range N ₂ , eq.	100:1 for F.S. from 1 - 50 slpm (50:1 for all other F.S. flows)					
Repeatability & Reproducibility	0.20% S.P.					
Linearity	Included in accuracy					
Response Time (Settling Time within $\pm 2\%$ F.S. for 0 - 100% command step)	<1 second		<3 second			
Zero Stability	<+0.2% F.S. per year					
Temperature Coefficient	Zero: <0.05% of F.S. per °C Span: <0.1% of S.P. per °C					
Pressure Coefficient	$\pm 0.03\%$ per psi (0 - 200 psi N ₂)					
Attitude Sensitivity	<0.2% F.S. maximum deviation from specified accuracy after re-zeroing					

Ratings

Operating Temperature Range	(-14) - 65°C (7 - 149°F) ⁵		
Minimum Pressure Differential (Controllers)	5 psi / 0.35 bar	10 psi / 0.69 bar	Min.: 7.5 psi / 0.52 bar at 500 lpm Min.: 14.5 psi / 1.00 bar at 1000 lpm Min.: 35.0 psi / 2.41 bar at 2500 lpm
Maximum Pressure Differential (Controllers)	Application specific up to 1500 psi / 103 bar (limits conditions) ⁶	Application specific up to 1500 psi / 103 bar	Application specific up to 290 psi / 20 bar
Leak Integrity (External)	1×10^{-9} atm. cc/sec He		
Valve Shut Down (Leak-by) ⁷	<1% of F.S. standard; improved shutoff available with Biotech package		

Mechanical

Valve Type	Normally Closed, Normally Open, Meter		
Primary Wetted Materials	316, 316/316L Stainless Steel, High Alloy, Stainless Steel, Viton® fluoroelastomers, Buna-N, Kalrez®, Teflon®/ Kalrez®, and EPDM		

Diagnostics

Status Lights	Normally Closed, Normally Open, Meter		
Alarms	Communications protocol dependent. Full set available on EtherNet/IP and PROFINET. See communications manuals for list.		
Diagnostic / Service Port	RS485 via 2.5mm jack		

⁴ Accuracy at calibration conditions; accuracy spec valid across the full control range.

⁵ Hazardous area certifications have a temperature range limitation of 0 - 65°C.

⁶ >1500 psi DP as a Special Order.

⁷ Metal and Teflon Seats <5% of full scale.

⁸ Alarm modes are dependent on the communications interface. These are described in the corresponding digital communication interface manual.

Product Specifications

	RS485/Analog	Profibus®	DeviceNet™	EtherCAT®	EtherNet/IP™ & PROFINET
Communication Protocol					
Electrical Connection	1 x 15-pin Male Sub-D, (A)	1 x 15-pin Male Sub-D/ 1 x 9-pin Female Sub-D	1 x M12 with threaded coupling nut (B)	1 x 5-pin M8 with threaded coupling nut 2 x RJ45	1 x 5 pin M8 with threaded coupling nut / 2 x RJ45
Analog I/O	0 - 5 V, 1 - 5 V, 0 - 10 V, 0 - 20 mA, 4 - 20 mA		N/A	0 - 5 V	N/A
Power Max. / Purge	From +13.5 Vdc to +27 Vdc	From +11 Vdc to +25 Vdc	From +11 Vdc to +25 Vdc	From +13.5 Vdc to +27 Vdc	From +13.5 Vdc to +27 Vdc
Power Requirements Watts, Max.	Valve Orifice >0.032": 8W Valve Orifice ≤0.032": 5W Without Valve: 2W	Valve Orifice >0.032": 10W Valve Orifice ≤0.032": 7W Without Valve: 4W	Valve Orifice >0.032": 8.5W Valve Orifice ≤0.032": 5.5W Without Valve: 2.5W	Valve Orifice >0.032": 10W Valve Orifice ≤0.032": 7W Without Valve: 3W	Valve Orifice >0.032": 10W Valve Orifice ≤0.032": 7W Without Valve: 3W
Web-based Network Settings Interface	N/A				The Default Network Address is 192.168.1.100 EtherNet/IP: Default Network Configuration is DHCP PROFINET: The Default Name is "brooks-sla"

Flow Input (Voltage) Specifications

Nominal Range	0 - 5 Vdc, 1 - 5 Vdc or 0 - 10 Vdc
Full Range	(-0.5) - 11 Vdc
Absolute Max	18 V (without damage)
Input Impedance	>990 kOhms
Required Max. Sink Current	0.002 mA

Flow Input (Current) Specifications

Nominal Range	4 - 20 mA or 0 - 20 mA
Full Range	0 - 22 mA
Absolute Max	24 mA (without damage)
Input Impedance	100 Ohms

Flow Output (Voltage) Specifications

Nominal Range	0 - 5 Vdc, 1 - 5 Vdc or 0 - 10 Vdc
Full Range	(-1) - 11 Vdc
Min Load Resistance	2 kOhms

Flow Output (Current) Specifications

Nominal Range	0 - 20 mA or 4 - 20 mA
Full Range	0 - 24.6 mA (@ 0 - 20 mA); 3.8-24.6 mA (@ 4 - 20 mA)
Max. Load	380 Ohms (for supply voltage: <16 Vdc)

Analog I/O Alarm Output⁹

Type	Open Collector
Max. Closed (On) Current	25 mA
Max. Open (Off) Leakage	1µA
Max. Open (Off) Voltage	30 Vdc

Analog I/O Valve Override Signal Specifications¹⁰

Floating / Unconnected	Instrument controls valve to command set point
VOR <0.3 Vdc	Valve Closed
1 Vdc < VOR < 4 Vdc	Valve Normal
VOR >4.8 Vdc	Valve Open
Input Impedance	800 kOhms
Absolute Max. Input	(-25 Vdc) < VOR < 25 Vdc (without damage)

⁹ The Alarm Output is an open collector or "contact type" that is CLOSED (on) whenever an alarm is active. The Alarm Output may be set to indicate any one of various alarm conditions.

¹⁰ The Valve Override Signal (VOR) is implemented as an analog input which measures the voltage at the input and controls the valve based upon the measured reading as shown in this section.

Product Specifications

SLA5800 Series Biotech

Options Packages

Performance Package - Model Code S or U (Position XII)

Includes multiple performance enhancements reducing cost of operation

High Turndown Ratio	Reduces number of MFCs needed to control wide flow ranges
Enhanced Control Valve	Extremely low leak rate can eliminate need for redundant valves
Enhanced Sensor Design	Clean welded construction meets industry standards for cleanliness
Pre-calibrated Multi-Gas Pages ¹¹	Air, CO ₂ , N ₂ & O ₂ : gas pages can be changed in situ to reduce the variety of spare instruments kept in stock

Premium Package - Model Code T or V (Position XII)

Performance Package Features plus:

Includes premium materials and associated certificates tailored to industry requirements

Class VI Elastomers	FDA/USP Class VI and ADI Free O-Rings and Valve Seats ¹² (Certificate Included)
Certifications	Materials of Construction (wetted path) 2.1 Material Cert ¹³ ICC Calibration Traceability

¹¹ CO₂ Actual Gas Calibration available for SLAMF50/60 & SLAMF51/61. Use Model Code U for Performance Package, and Model Code V for Premium package.

¹² All Class VI Viton elastomers are also compliant to 21CFR177.2600 (Title 21 – Food & Drugs, Chapter I - FDA).

¹³ 3.1 Material Certs for pressure boundary components available as an option on Premium Package.

	SLA5850/60	SLA5851/61	SLA5853/63	
Performance				
Full Scale Flow Range¹⁵ (N ₂ , Eq. 0°C Ref)	5 sccm - 50 slpm	15 - 150 slpm ¹⁴	100 - 1100 slpm	>1100 - 2500 slpm
Gasses Supported				
	Air, CO ₂ , Nitrogen & Oxygen			
Flow Accuracy—17025 Certified Devices (includes linearity, excludes calibration system measurement uncertainty per SEMI E69)	±0.6% of S.P. (20 - 100% F.S.), ±0.12% of F.S. (<20% F.S.)			±0.6% of F.S.
Flow Accuracy (includes linearity and calibration system measurement uncertainty per SEMI E69) ¹⁶	±0.9% of S.P. (20 - 100% F.S.), ±0.18% of F.S. (<20% F.S.)			±1.0% of F.S.
Repeatability & Reproducibility				
	0.20% S.P.			
Turndown (Control Range)	250:1	250:1	150:1	
Response Time	<1 Second	<1 Second	<3 Second	
Zero Stability	<+0.2% F.S. per year			
Temperature Coefficient	<0.05% F.S. per °C			
Valve Shut Down (Leak-by)	<0.005 sccm			<15.6 sccm

Ratings

Inlet Pressure Range	5 psig - 75 psig	10 psig - 75 psig	8 psig - 75 psig
Minimum Pressure Differential (Controllers)¹⁷	5 psi / 0.35 bar	10 psi / 0.69 bar	Min.: 7.5 psi / 0.52 bar at 500 lpm Min.: 14.5 psi / 1.00 bar at 1000 lpm Min.: 35.0 psi / 2.41 bar at 2500 lpm
Maximum Pressure Differential (Controllers)¹⁸	75 psi / 5 bar		
Maximum Pressure	Same as standard		
Valve Configuration	Standard SLA with Special Factory Tuning / Normally Closed		
Operating Temperature Range	-14°C - 50°C		
Sensor Design	Enhanced construction to meet industry standards for cleanliness		

¹⁴ Maximum flow depends on pressure conditions; consult Applications Engineering for details

¹⁵ Calibration on CO₂ available as an option on SLA5850/60 & SLA5851/61


¹⁶ Accuracy at Calibration Conditions; Accuracy spec valid across the full control range

¹⁷ Performance at minimum inlet pressure will be gas and flow range dependent. Consult Applications Engineering for details

¹⁸ For optimum performance operate at the specified inlet and outlet pressure values

Product Dimensions

SLA58 Sizes - 50, 51, 60, 61

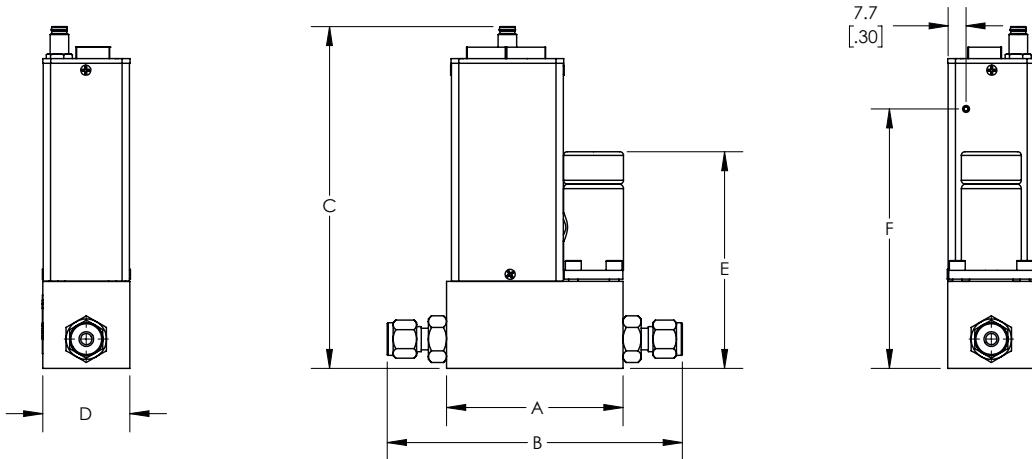

Fittings - Dimension "B"


Fitting	50	51**	60	61**
	mm / inch	mm / inch	mm / inch	mm / inch
9/16" - 18 UNF	76.4 / 3.01	93.5 / 3.68	58.6 / 2.31	80.0 / 3.15
1/8" Tube Comp.	123.1 / 4.85	N/A	105.3 / 4.15	N/A
1/4" Tube Comp.*	127.7 / 5.03	144.8 / 5.7	109.9 / 4.33	131.3 / 5.17
3/8" Tube Comp.*	130.7 / 5.15	147.9 / 5.82	112.9 / 4.45	134.4 / 5.29
1/2" Tube Comp.*	134.8 / 5.31	152.0 / 5.98	117 / 4.61	138.4 / 5.45
1/4" VCO	116 / 4.56	141.3 / 5.56	98.2 / 3.87	119.6 / 4.71
3/8" - 1/2" VCO	127.2 / 5.01	144.3 / 5.68	109.4 / 4.31	130.9 / 5.15
1/4" NPT-F	118.5 / 4.67	133.2 / 5.24	98.8 / 3.89	122.2 / 4.81
3mm Tube Comp.*	122.2 / 4.81	N/A	104.4 / 4.11	N/A
6mm Tube Comp.*	127.8 / 5.03	144.9 / 5.71	110 / 4.33	131.3 / 5.17
10mm Tube Comp.*	131.1 / 5.16	148.3 / 5.84	113.5 / 4.47	134.9 / 5.31
1/4" VCR	124.1 / 4.89	141.3 / 5.56	106.3 / 4.19	127.8 / 5.03
3/8" - 1/2" VCR	131.7 / 5.19	148.9 / 5.86	113.9 / 4.48	135.4 / 5.33
1/4" RC (BSP)	116.6 / 4.59	133.7 / 5.27	98.8 / 3.89	120.2 / 4.73
1/4" RP (BSP)	116.6 / 4.59	133.7 / 5.27	98.8 / 3.89	120.2 / 4.73
1/2" Sanitary	140.5 / 5.53	157.5 / 6.2	122.7 / 4.83	144.0 / 5.67
3/4" Sanitary	140.5 / 5.53	157.5 / 6.2	122.7 / 4.83	144.0 / 5.67

* Overall length is finger tight.

** Devices with 5848 inlet filter will be 1.41" Longer.

Electro / Mechanical Dimensions

Model	A	C					D	E			F	G
		Analog RS485		Profibus	DeviceNet	EtherCAT		N.C.	N.O.	NO VALVE		
		mm / inch		mm / inch	mm / inch	mm / inch	mm / inch	Tap Depth				
5850	76.4 / 3.01	137.4 / 5.41	137.4 / 5.41	134.1 / 5.28	148.0 / 5.83	148.0 / 5.83	37.7 / 1.48	93.2 / 3.67	100.3 / 3.95	45.7 / 1.80	112.3 / 4.42	.31"
5851	93.5 / 3.68	143.9 / 5.66	143.9 / 5.66	140.5 / 5.53	154.4 / 6.08	154.4 / 6.08	44.2 / 1.74	100.3 / 3.95	107.8 / 4.24	52.1 / 2.05	118.8 / 4.68	.22"
5860	58.6 / 2.31	137.4 / 5.41	137.4 / 5.41	134.1 / 5.28	148.0 / 5.83	148.0 / 5.83	37.7 / 1.48	N/A	N/A	N/A	112.3 / 4.42	.27"
5861	80.0 / 3.15	143.9 / 5.66	143.9 / 5.66	140.5 / 5.53	154.4 / 6.08	154.4 / 6.08	44.2 / 1.74	N/A	N/A	N/A	118.8 / 4.68	6mm

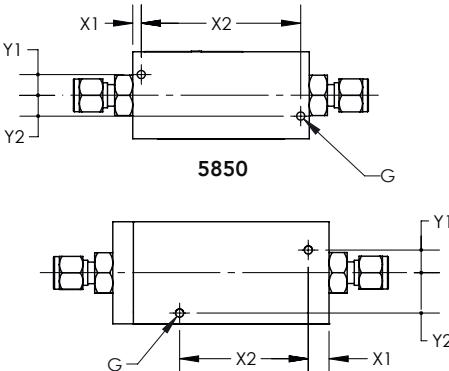


(2) 8-32 Mounting Holes

Model	X1 mm / inch	X2 mm / inch	Y1 mm / inch	Y2 mm / inch
5850	3.7 / .14	69.0 / 2.72	9.0 / .35	9.0 / .35
5851	9.0 / .35	55.7 / 2.19	9.9 / .39	17.4 / .68
5860	9.1 / .36	40.4 / 1.59	10.2 / .40	10.2 / .40
5861	11.7 / .46	39.4 / 1.55	17.3 / .68	17.3 / .68

Product Dimensions

SLA58 Sizes - 53, 63


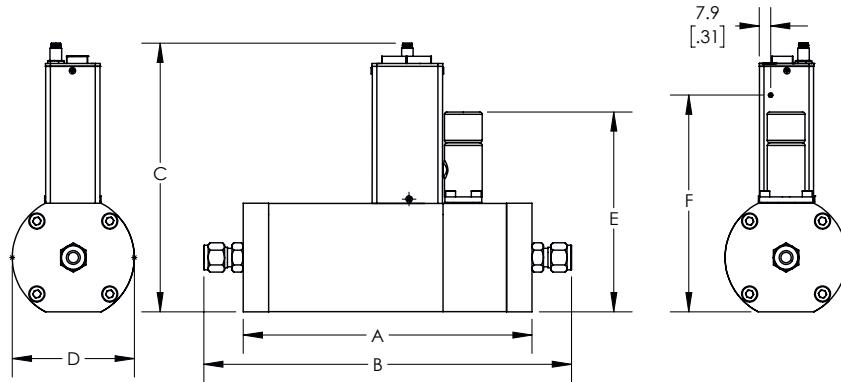


Fittings / Flanges - Dimension "B"

Fitting / Flange	53	63
	mm / inch	mm / inch
9/16" - 18 UNF	199 / 7.8	155 / 6.1
1-1/16" - 12 UN	199 / 7.8	155 / 6.1
1-5/16" - 12 UN	199 / 7.8	155 / 6.1
3/8" Tube Comp.*	253 / 10	209 / 8.2
1/2" Tube Comp.*	267 / 10.5	223 / 8.8
3/4" Tube Comp.*	267 / 10.5	223 / 8.8
1" Tube Comp.*	274 / 10.8	232 / 9.1
3/8" - 1/2" VCO	249 / 9.8	206 / 8.1
3/4" VCO	257 / 10.1	213 / 8.4
1" VCO	259 / 10.2	216 / 8.5
1/2" NPT	199 / 7.8	155 / 6.1
1" NPT	199 / 7.8	155 / 6.1
1 - 1/2" NPT	199 / 7.8	155 / 6.1
12mm Tube Comp.*	262.1 / 10.32	219 / 8.62
3/8" - 1/2" VCR	257 / 10.1	213 / 8.4
3/4" VCR	279 / 11	236 / 9.3
1" VCR	285 / 11.2	241 / 9.5
1/2" RC (BSP)	199 / 7.8	155 / 6.1
1" RC (BSP)	199 / 7.8	155 / 6.1
1/2" Sanitary	262.6 / 10.34	220 / 8.64
3/4" Sanitary	262.6 / 10.34	220 / 8.64
1" Sanitary	262.6 / 10.34	220 / 8.64
ANSI 1/2" 150#	301 / 11.8	257 / 10.1
ANSI 1/2" 300#	301 / 11.8	257 / 10.1
ANSI 1" 150#	301 / 11.8	257 / 10.1
ANSI 1" 300#	301 / 11.8	257 / 10.1
ANSI 1.5" 150#	301 / 11.8	257 / 10.1
ANSI 1.5" 300#	301 / 11.8	257 / 10.1
ANSI 2" 150#	301 / 11.8	257 / 10.1
ANSI 2" 300#	301 / 11.8	257 / 10.1
DIN DN15 PN40	301 / 11.8	257 / 10.1
DIN DN25 PN40	301 / 11.8	257 / 10.1
DIN DN40 PN40	301 / 11.8	257 / 10.1
DIN DN50 PN40	301 / 11.8	257 / 10.1

* Overall length is finger tight.

FITTING CONFIGURATIONS

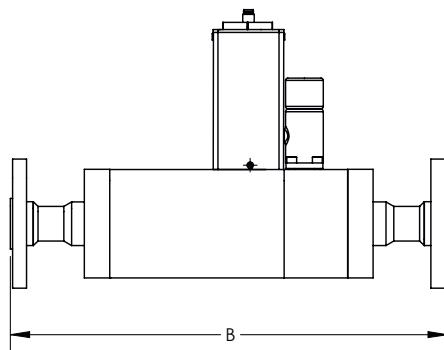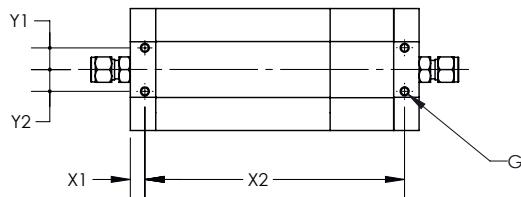

FLANGE CONFIGURATIONS

(4) M6 Mounting Holes

Model	X1	X2	Y1	Y2
	mm / inch	mm / inch	mm / inch	mm / inch
5853	10.0 / .39	178.8 / 7.04	15.0 / .59	15.0 / .59
5863	10.0 / .39	135.0 / 5.32	15.0 / .59	15.0 / .59

Electro / Mechanical Dimensions

Model	A	C					D	E	F	G
		Analog RS485	Profibus	DeviceNet	EtherCAT	Profinet / EtherNet				
		mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	Tap Depth
5853	199.0 / 7.8	174.3 / 6.86	174.3 / 6.86	171.0 / 6.73	184.9 / 7.28	184.9 / 7.28	84.0 / 3.31	137.0 / 5.4	149.2 / 5.87	6mm
5863	155.0 / 6.1	174.3 / 6.86	174.3 / 6.86	171.0 / 6.73	184.9 / 7.28	184.9 / 7.28	84.0 / 3.31	N/A	149.2 / 5.87	6mm

Code Description	Code Option	Option Description
I. Base Model Numbers	SLA	
II. Package / Finish Specifications	58	Standard Elastomer Series
III. Function	5	Mass Flow Controller
	6	Mass Flow Meter
IV. Body Size (Select based on Flow Range)	0	3 ccm - 50 lpm
	1	15 - 150 lpm
	3	100 - 2500 lpm
V. Digital I/O Communication	A	None (select applicable analog I/O)
	D	DeviceNet I/O (with 5-pin micro connector)
	E	EtherCAT I/O (with 5-pin Nano-change connector)
	P	Profibus (2x sub-D)
	S	RS485 (select applicable analog I/O)
	7	EtherNET/IP™ I/O (with 5-pin Nano-change M8 Connector)
	8	PROFINET (with 5-pin Nano-change M8 Connector)
VI. Mechanical Connection (Body size 0 & 1 only)	1A	Without adapters, 9/16" - 18 UNF
	1B	1/4" tube compression
	1C	1/8" tube compression
	1D	3/8" tube compression
	1E	1/4" VCR
	1F	1/4" VCO
	1G	1/4" NPT
	1H	6mm tube compression
	1J	10mm tube compression
	1L	3/8" - 1/2" VCR
	1M	3/8" - 1/2" VCO
	1P	1/2" tube compression
	1Q	1/4" RP (BSP)
	1S	Elastomer downport
	1T	1/4" RC (BSP)
	1Y	3mm tube compression
	B1	1/4" tube compression with Filter
	C1	1/8" tube compression with Filter
	D1	3/8" tube compression with Filter
	E1	1/4" VCR with Filter
	F1	1/4" VCO with Filter
	G1	1/4" NPT with Filter
	H1	6mm tube compression with Filter
	J1	10mm tube compression with Filter
	L1	3/8" - 1/2" VCR with Filter
	M1	3/8" - 1/2" VCO with Filter
	P1	1/2" tube compression with Filter
	Q1	1/4" RP (BSP) with Filter
	T1	1/4" RC (BSP) with Filter
	Y1	3mm tube compression with Filter
	5A ¹⁹	9/16 - 18 X 1/2" Sanitary
	5B ¹⁹	9/16 - 48 X 3/4" Sanitary

¹⁹ Sanitary Fittings Model Code 5A, 5B, 5C, 5D and 5E are dimensioned in accordance to ASME-BPE and are limited to 500 psi Maximum Pressure

Code Description	Code Option	Option Description
VI. Mechanical Connection (Body size 3 only)	2A	Without adapters, 9/16" - 18 UNF
	2B	Without adapters, 1-1/16" - 12 UN-2B
	2C	3/8" tube compression
	2D	1/2" tube compression
	2E	3/4" tube compression
	2F	1" tube compression
	2G	1/2" NPT (F)
	2H	1" NPT (F)
	2J	1-1/2" NPT (F)
	2K	1/2" VCO
	2L	3/4" VCO
	2M	1/2" VCR
	2N	1/2" RC (BSP)
	2P	1" RC (BSP)
	2R	Without adapters, 1-5/16"-12 UN-2B
	2S	1" VCO
	2T	3/4" VCR
	2U	1" VCR
	3A	DIN DN15 PN40 Flange
	3B	DIN DN25 PN40 Flange
	3C	DIN DN40 PN40 Flange
	3D	DIN DN50 PN40 Flange
	3E	ANSI 1/2" 150# RF Flange
	3F	ANSI 1/2" 300# RF Flange
	3G	ANSI 1" 150# RF Flange
	3H	ANSI 1 1/2" 150# RF Flange
	3J	ANSI 1 1/2" 300# RF Flange
	3K	ANSI 2" 300# RF Flange
	3L	ANSI 2" 150# RF Flange
	3M	ANSI 2" 300# RF Flange
	5C ¹⁹	1 1/16-12 X 1/2" Sanitary
	5D ¹⁹	1 1/16-12 X 3/4" Sanitary
	5E ¹⁹	1 1/16-12 X 1" Sanitary
VII. O-ring Material	A	Viton
	B	Buna
	C	PTFE
	D	Kalrez
	E	EPDM
	J	FDA/USP Class VI and ADI Free - Viton/FKM ²⁰
	L	FDA/USP Class VI - EPDM
VIII. Valve Seat	A	None (Sensor only)
	B	Viton (for body size 3, diaphragm material = Viton)
	C	Buna (for body size 3, diaphragm material = PTFE)
	D	Kalrez (for body size 3, diaphragm material = PTFE)
	E	EPDM (for body size 3, diaphragm material = PTFE)
	F	PTFE (for body size 3, diaphragm material = PTFE)
	G	Metal (for body size 3, diaphragm material = PTFE)
	J	FDA/USP Class VI and ADI Free - Viton/FKM ²⁰ (for body size 3, diaphragm material = FDA/USP Class VI Viton/FKM)
IX. Valve Type	0	None (Sensor only)
	1	Normally closed
	2	Normally closed (Size 3, Pressure diff. >30 psig (2 bar))
	3	Normally closed (Size 3, Pressure diff. <30 psig (2 bar))
	4	Normally closed - high pressure
	5	Normally open

¹⁹ Sanitary Fittings Model Code 5A, 5B, 5C, 5D and 5E are dimensioned in accordance to ASME-BPE and are limited to 500 psi Maximum Pressure²⁰ Material is compliant to 21CFR177.2600 (Title 21 – Food & Drugs, Chapter I - FDA)²¹ CO₂ Actual Gas Calibration available for SLA5850/60 & SLA5851/61

Model Code

Code Description	Code Option	Option Description
X. Analog I/O Communications	A	None - Digital Communication only
	B	0 - 5 Volt
	C	4 - 20 mA
	L	1 - 5 Volt
	M	0 - 20 mA
	0	0 - 10 Volt
	1	0 - 5 Volt
	2	0 - 5 Volt
	3	4 - 20 mA
	4	0 - 20 mA
	9	0 - 10 Volt
XI. Power Supply Inputs	1	+15 Vdc
	2	24 Vdc
XII. Output Enhancements	A	Standard Response
	S	Biotech Performance Package
	T	Biotech Premium Package
	U	Performance Package with CO ₂ Calibration ²¹
	V	Premium Package with CO ₂ Calibration ²¹
XIII. Certification	1	Safe Area
	2	For Zone 2
	4	Div. 2/Zone 2 UL Recognized
	5	Zone 2 IECEx
	6	KOSHA

Sample Model Code

I	II	III	IV	V	VI	VII	VIII	IX	X	XI	XII	XIII
SLA	58	5	0	A	1A	A	B	1	B	1	A	1

Approvals, Certifications and Services

Product Approvals Overview

Mark	Agency	Certification	Applicable Standard	Details
 UL [®] US	UL (Recognized)	Class I, Div 2, Group A, B, C, D Class I, Zone 2, IIC T4 Class II, Zone 22 Enclosure: Type 1/IP40	UL & CSA Standards	E73889 Vol 3, Sec 4
	ATEX	II 3 G Ex nA IIC T4 Gc	EN 60079-0:2012 EN 60079-15:2010	KEMA 04ATEX 1118X
	IECEx	II 3 G Ex nA IIC T4 Gc	IEC 60079-0:2011 IEC 60079-15:2010	IECEEx DEK 14.0072X
	KOSHA	Ex nA IIC T4		15-AV4BO-0641 15-AV4BO-0640
	CE	EMC Directive 2014/30/EU Directive 2011/65/EU	EN:61326-1:2013	EMC RoHS

ATEX/IECEx Special Conditions: please see Certification section of the SLA5800 Installation & Operations Manual

Additional Certification and Service Options

Material Compliance Certifications

[Material Certificate 2.1](#)

[Material Certificate 3.1](#)

[Declaration of Compliance 2.1 - O-ring USP Class VI / ADI Free](#)

[Declaration of Compliance 2.1 - Elastomer USP Class VI / ADI Free](#)

[Declaration of Compliance 2.1 - Elastomer Cure Date / Shelf Life](#)

[Declaration of Compliance 2.1 - Surface Roughness](#)

Metrology Certifications

[Declaration of Compliance 2.1 - Calibration](#)

[Inspection Certificate 3.1 - NIST Calibration](#)

[Declaration of Compliance 3.1 - International Certificate of Calibration](#)

[ISO 17025 Certification](#)

Additional Services and Certifications

[Certificate of Compliance 2.1](#)

[Declaration of Compliance 2.1 - Oxygen Cleaning Service](#)

[Declaration of Compliance 2.2 - Pressure Test](#)

[KHK Certification](#)

[CRN Certification](#)

[Certificate of Origin](#)

Service and Support

Brooks is committed to assuring all of our customers receive the ideal flow solution for their application, along with outstanding service and support to back it up. We operate first class repair facilities located around the world to provide rapid response and support. Each location utilizes primary standard calibration equipment to ensure accuracy and reliability for repairs and recalibration and is certified by our local Weights and Measures Authorities and traceable to the relevant International Standards.

Visit www.BrooksInstrument.com to locate the service location nearest to you.

START-UP SERVICE AND IN-SITU CALIBRATION

Brooks Instrument can provide start-up service prior to operation when required. For some process applications, where ISO-9001 Quality Certification is important, it is mandatory to verify and/or (re)calibrate the products periodically. In many cases this service can be provided under in-situ conditions, and the results will be traceable to the relevant international quality standards.

CUSTOMER SEMINARS AND TRAINING

Brooks Instrument can provide customer seminars and dedicated training to engineers, end users, and maintenance persons. Please contact your nearest sales representative for more details. Due to Brooks Instrument's commitment to continuous improvement of our products, all specifications are subject to change without notice.

TRADEMARKS

BrooksBrooks Instrument, LLC
All other trademarks are the property of their respective owners.



Data-Sheet-SLA5800-EN/2025-10

Global Headquarters

Brooks Instrument
407 West Vine Street
Hatfield, PA
19440-0903 USA

Toll-Free (USA): 888-554-FLOW
T: 215-362-3500

BrooksAM@BrooksInstrument.com

A list of all Brooks Instrument locations and contact details can be found at www.BrooksInstrument.com

©Copyright 2025 Brooks Instrument, LLC All rights reserved. Printed in U.S.A.